




SPECTRA-CON GROUP INC.

BASIC ACCESS DOORS S-BAS SERIES - General Purpose Flush Access Door

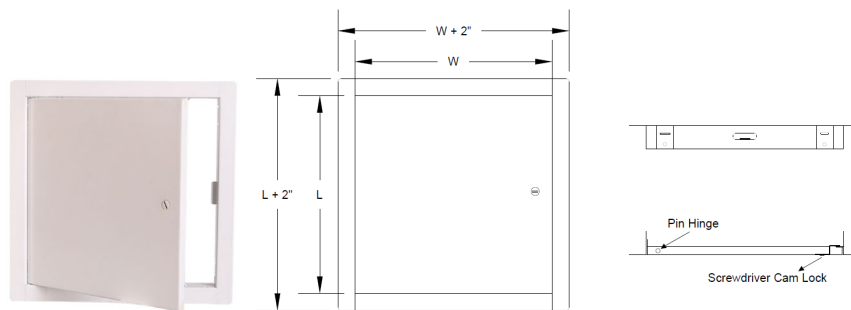

Rough-in opening: 6mm (1/4") on each side of door

SKU	Nominal Size	Door Opening Size		Number of locks	Weight per unit (lbs)
		W Width	L Length		
S-BAS 06-06	6x6	5.64" (143 mm)	5.64" (143 mm)	1	1.37
S-BAS 08-08	8x8	7.64" (194 mm)	7.64" (194 mm)	1	1.94
S-BAS 10-10	10x10	9.64" (245 mm)	9.64" (245 mm)	1	2.60
S-BAS 12-12	12x12	11.64" (296 mm)	11.64" (296 mm)	1	3.35
S-BAS 14-14	14x14	13.64" (346 mm)	13.64" (346 mm)	1	4.19
S-BAS 16-16	16x16	15.64" (397 mm)	15.64" (397 mm)	1	5.00
S-BAS 18-18	18x18	17.64" (448 mm)	17.64" (448 mm)	1	6.08
S-BAS 20-20	20x20	19.64" (499 mm)	19.64" (499 mm)	1	9.81
S-BAS 24-24	24x24	23.59" (599 mm)	23.59" (599 mm)	1	12.17
S-BAS 24-36	24x36	23.59" (599 mm)	35.59" (904 mm)	2	16.64
S-BAS 36-36	36x36	35.59" (904 mm)	35.59" (904 mm)	2	24.10

Application	For installation on any type of gypsum drywall, plaster, tile, masonry or any flush surface Wall or ceiling installation
Description	White powder-coated finish – Paintable Rounded corners Easy installation
Specifications	Cold rolled steel - 0.9mm (20Ga.) door panel & 1.2mm (18Ga.) frame for 6"x6" to 20"x20" 1.2mm(18Ga.) door panel & 1.5mm(16Ga.) frame for 24"x24", 24"x36", 36"x36" Concealed pin hinges Screwdriver cam latch

		Quantity	Width (W)	Length (L)	Comments/ Special Instructions
Client:					
Project Name:					
Location:					
Date:					
Approved By (please print):		Approved by (Signature):			

S-BAS Submittal Data Sheet / Technical Data Sheet

Spectra-Con Group Inc. 8-90 Venture Dr. Scarborough, ON. M1B 3L6. 416-286-2953. info@spectra-con.com